

**合作 · 共赢 · 创新 · 发展**  
cooperate · win-win · innovate · develop

**BAOTENG  
TECHNOLOGY  
宝腾科技**

**宁波宝腾科技有限公司**

NINGBO BAOTENG TECHNOLOGY CO.,LTD

地址：宁波市奉化区方桥工业园庙前路6号

Add: no. 6 Miaoqian Road Fangqiao Industrial Zone Fenghua District

Ningbo City, Zhejiang Province, China

Tel: +86 574-883 666 64

Mob: +86 134 292 818 12

Whatsapp: +86 153 5588 8818

Email: manager@baoteng.cc

Website: www.baoteng.cc



扫码添加微信



**合作 · 共赢 · 创新 · 发展**

cooperate · win-win · innovate · develop

## 宁波宝腾科技有限公司

NINGBO BAOTENG TECHNOLOGY CO.,LTD

宁波宝腾科技有限公司专业生产各种车库门，工业门，商用门的滚轮，合页，轨道，支架，角铁，钢丝绳轮，拉手，锁，等一整套五金配件和其他OEM产品。

本公司拥有先进的高速冲床，数控折弯机，切料机，油压机，注塑机，线切割机，车床，磨床，自动装配机等机器设备，并有一批理论基础扎实，实践经验丰富的技术管理和开发性人才，在开发新产品和生产过程中不断采用新技术，优化产品质量。

公司经过多年的发展，拥有强大的设计开发队伍，拥有自己的设计理念及风格，我们将设计更新，更准确的产品来满足客户的要求，欢迎莅临我们公司，我们合作共赢。




Ningbo baoteng technology co., Ltd. specializes in producing a complete set of hardware accessories and other OEM products for various garage doors, industrial doors, commercial doors, and residential doors, including rollers, hinges, tracks, brackets, angle irons, cable drums, handles, locks, etc.

The company has advanced high-speed punching machines. cnc bender, laser cutting machines, hydraulic presses, injection molding machines, wire cutting machines, lathes, grinders, automatic assembly machines and other equipments. we also have a group of technical management and develop talents with solid theoretical foundations and rich practical experience. Continuously adopting new technologies in the development and production process of new products to optimize product quality.

After years of development , the company has a strong design and development team with its own design philosophy and style. we will design updated and more accurate products to meet customer needs. welcome to our company and establish new business with us .



## INDUSTRIAL DOOR HARDWARE

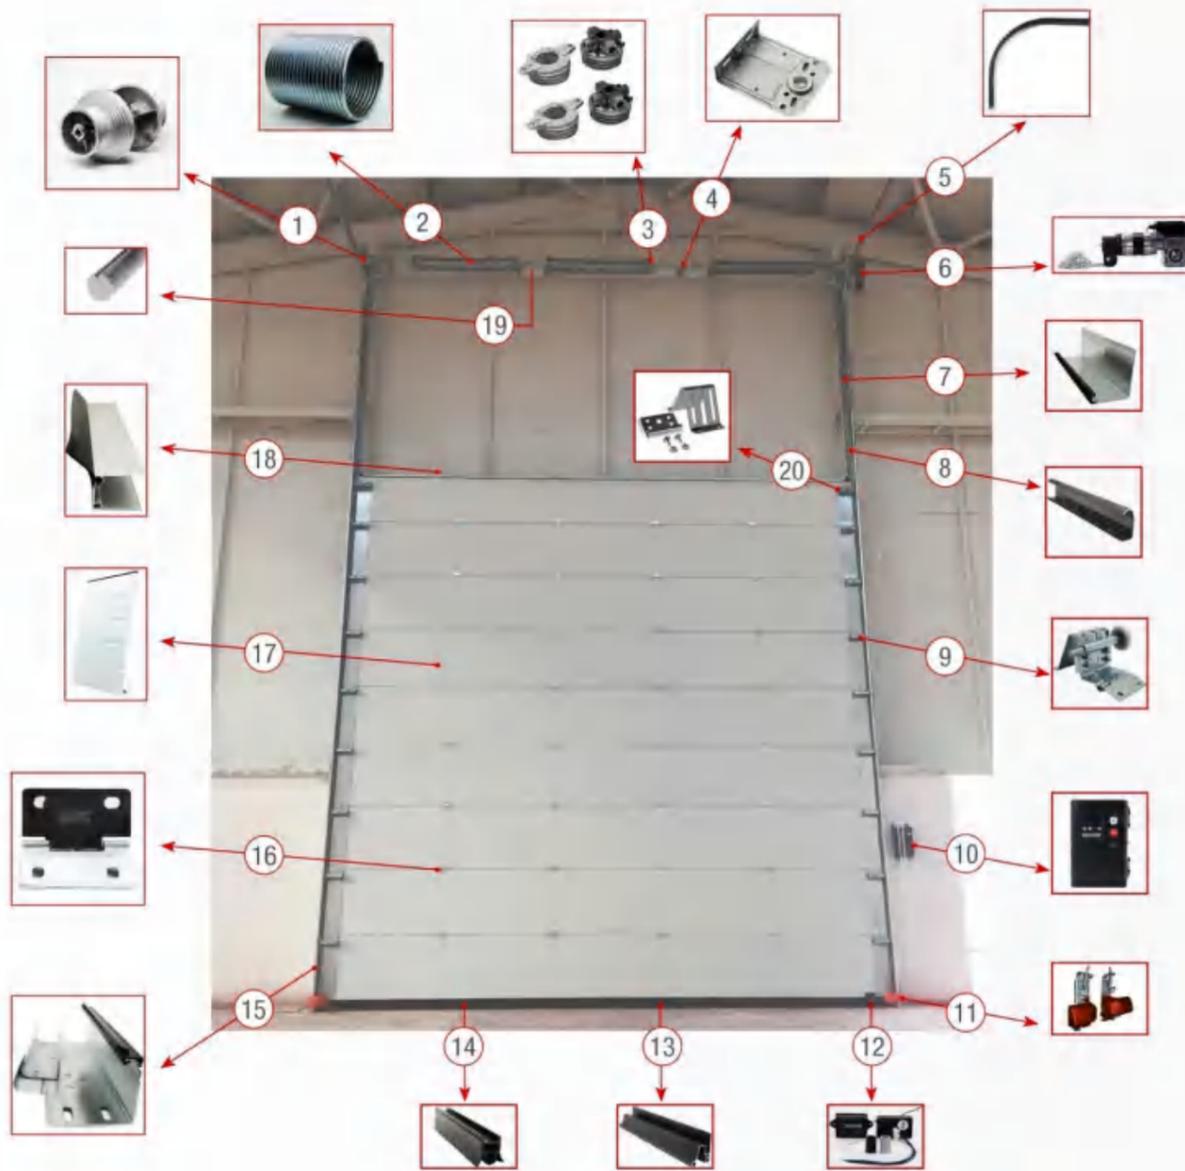

1- Cable Drum	8- Vertical Track	15- Track set with seal
2- Spring	9- Side Hinge and Roller	16- Middle Hinge
3- Spring Fitting	10- Control Board	17- Panel
4- Bearing Bracket	11- Cable Break Device	18- Top Profile and Seal
5- Curve Track	12- Bottom Safety System	19- Shaft
6- Motor	13- Bottom Profile	20- Top Roller Bracket
7- Vertical Angle and Seal	14- Bottom Seal	

# Contents

滚轮系列 Roller series ..... 01-02

合页系列 Hinge series ..... 03-08

支架系列 Bracket series ..... 09-13

连接件 & 轨道系列 Angle & track series ..... 14-16

弹簧系列 Spring series ..... 17-18

线轮系列 Cable drum series ..... 19-20

轴 & 联轴器系列 Shaft & Coupler series ..... 21-22

拉手 & 锁系列 Handle & Lock series ..... 23-24

门板 & 窗户 Panel & Window ..... 25

其它 & 电机 Other & Motor ..... 26-29



BT-R001

**6200轴承尼龙滚轮**

材料:尼龙, 碳钢  
杆直径11mm  
杆长120mm  
适用于2"轨道

**Nylon Roller with 6200rs bearing**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 120mm  
Suitable for 2" track



BT-R002

**11球尼龙滚轮**

材料:尼龙, 碳钢  
杆直径11mm  
杆长120mm  
适用于2"轨道

**Nylon Roller with 11 ball**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 120mm  
Suitable for 2" track



BT-R003

**黑色轴承尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长120mm&195mm  
适用于2"轨道

**Black Nylon Roller with bearing**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 120mm&195mm  
Suitable for 2" track



BT-R010

**无滚珠尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长120mm  
适用于2"轨道

**Nylon Roller without ball**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 120mm  
Suitable for 2" track



BT-R011

**快速门滚轮**

材料: 尼龙, 碳钢  
杆直径10mm  
杆长130mm  
适用于快速卷门

**Quick rolling door roller**

Material:Nylon,carbon steel  
Rod diameter 10mm  
Length: 130mm  
Suitable for quick rolling door



BT-R012

**快速门滚轮**

材料: 尼龙, 碳钢  
杆直径10mm  
杆长130mm  
适用于快速卷门

**Quick rolling door roller**

Material:Nylon,carbon steel  
Rod diameter 10mm  
Length: 130mm  
Suitable for quick rolling door



BT-R004

**紫色轴承尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长120mm  
适用于2"轨道

**Purple Nylon Roller with bearing**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 120mm  
Suitable for 2" track



BT-R005

**蓝色轴承尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长120mm  
适用于2"轨道

**Blue Nylon Roller with bearing**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 120mm  
Suitable for 2" track



BT-R006

**黄色轴承尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长120mm  
适用于2"轨道

**Yellow Nylon Roller with bearing**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 120mm  
Suitable for 2" track



BT-R013

**6200轴承尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长195mm  
适用于2"轨道

**Nylon Roller with 6200rs bearing**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 195mm  
Suitable for 2" track



BT-R014

**11球尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长195mm  
适用于2"轨道

**Nylon Roller with 11 ball**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 195mm  
Suitable for 2" track



BT-R015

**防尘静音尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长170mm  
适用于2"轨道

**Mute Nylon Roller with cover**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 170mm  
Suitable for 2" track



BT-R007

**防尘静音尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长120mm  
适用于2"轨道

**Mute Nylon Roller with cover**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 120mm  
Suitable for 2" track



BT-R008

**不锈钢尼龙滚轮**

材料: 尼龙, 不锈钢  
杆直径11mm  
杆长120mm  
适用于2"轨道

**Stainless steel Nylon Roller**

Material:Nylon,stainless steel  
Rod diameter 11mm  
Length: 120mm  
Suitable for 2" track



BT-R009

**黑色轴承尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长120mm&195mm  
适用于2.5"轨道

**Black Nylon Roller with bearing**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 120mm&195mm  
Suitable for 2.5" track



BT-R016

**铁滚轮**

材料: 碳钢, 镀锌  
杆直径11mm  
杆长195mm&120mm  
适用于2"轨道

**Steel Roller**

Material:Carbon steel  
zinc plated  
Rod diameter 11mm  
Length: 195mm&120mm  
Suitable for 2" track



BT-R017

**黑色轴承尼龙滚轮**

材料: 尼龙, 碳钢  
杆直径11mm  
杆长195mm&120mm  
适用于3"轨道

**Black Nylon Roller with bearing**

Material:Nylon,carbon steel  
Rod diameter 11mm  
Length: 195mm&120mm  
Suitable for 3" track



BT-R018

**铁滚轮**

材料: 碳钢, 镀锌  
杆直径11mm  
杆长195mm  
适用于3"轨道

**Steel Roller**

Material:Carbon steel,zinc plated  
Rod diameter 11mm  
Length: 195mm  
Suitable for 3" track



BT-H101

**中心合页**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-H102

**中心合页**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-H103

**中心合页**  
 厚度: 2.5mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.5mm  
 Finish:Galvanized



BT-H110

**中心合页**  
 厚度: 2.0mm  
 宽度: 70mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.0mm  
 Width:70mm  
 Finished:Galvanized



BT-H111

**防夹手中心合页**  
 厚度: 2.0mm  
 宽度: 70mm  
 表面: 镀锌  
**Finger Protection Center Hinge**  
 Thickness:2.0mm  
 Width:70mm  
 Finished:Galvanized



BT-H112

**中心合页**  
 厚度: 2.0mm  
 材料: 304不锈钢  
**Center Hinge**  
 Thickness:2.0mm  
 Material:304 Stainless steel



BT-H104

**中心合页**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-H105

**中心合页**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-H106

**中心合页**  
 厚度: 2.3mm  
 宽度: 70mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.3mm  
 Width:70mm  
 Finish:Galvanized



BT-H113

**中心合页**  
 厚度: 2.5mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.5mm,  
 Width 90mm  
 Finish:Galvanized



T-H114

**中心合页**  
 厚度: 2.5mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.5mm  
 Finish:Galvanized



BT-H116

**消音防夹手边合页**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Mute Finger Protection Side Hinge**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-H107

**防夹手中心合页**  
 厚度: 2.0mm  
 表面: 镀锌  
**Finger Protection Center Hinge**  
 Thickness:2.0mm  
 Finished:Galvanized



BT-H108

**透视门用中心合页**  
 厚度: 2.3mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.3mm  
 Finished:Galvanized



BT-H109

**中心合页**  
 厚度: 2.5mm  
 宽度: 70mm  
 表面: 镀锌  
**Center Hinge**  
 Thickness:2.5mm  
 Width:70mm  
 Finished:Galvanized



BT-H117

**消音防夹手边合页**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Mute Finger Protection Side Hinge**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-H118

**消音边合页**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Mute Finger Protection Side Hinge**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-H119

**边合页**  
 厚度: 2.3mm  
 表面: 镀锌  
**Side Hinge**  
 Thickness:2.3mm  
 Finish:Galvanized



BT-H120

**消音边合页**  
 厚度: 2.3mm  
 表面: 镀锌  
**Mute Side Hinge**  
 Thickness:2.3mm  
 Finished:Galvanized



BT-H121

**边合页**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Side Hinge**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-H122

**防夹手边合页**  
 厚度: 2.0mm  
 表面: 镀锌  
**Finger Protection Side Hinge**  
 Thickness:2.0mm  
 Finished:Galvanized



BT-H129

**0#合页**  
 厚度: 1.8mm  
 表面: 镀锌  
**14Ga 0# Hinge**  
 Thickness:1.8mm  
 Finish:Galvanized



BT-H130

**0#合页**  
 厚度: 1.8mm  
 表面: 镀锌板  
**0#Hinge**  
 Thickness:1.8mm  
 Finished:Pre-galvanized



BT-H131

**双滚轮合页**  
 厚度: 2.0mm  
 表面: 镀锌  
**Hinge**  
 Thickness:2.0mm  
 Finished:Galvanized



BT-H123

**边合页**  
 厚度: 2.0mm  
 宽度: 70mm  
 表面: 镀锌  
**Side Hinge**  
 Thickness:2.0mm  
 Width:70mm  
 Finished:Galvanized



BT-H124

**防夹手边合页**  
 厚度: 2.0mm  
 宽度: 70mm  
 表面: 镀锌  
**Finger Protection Side Hinge**  
 Thickness:2.0mm  
 Width:70mm  
 Finished:Galvanized



BT-H125

**防夹手边合页**  
 厚度: 2.0mm  
 宽度: 60mm  
 表面: 镀锌  
**Finger Protection Side Hinge**  
 Thickness:2.0mm  
 Width:60mm  
 Finished:Galvanized



BT-H132

**1#合页**  
 厚度: 1.8mm  
 表面: 镀锌  
**14Ga 1# Hinge**  
 Thickness:1.8mm  
 Finish:Galvanized



BT-H133

**2#合页**  
 厚度: 1.8mm  
 表面: 镀锌  
**14Ga 2# Hinge**  
 Thickness:1.8mm  
 Finish:Galvanized



BT-H134

**3#合页**  
 厚度: 1.8mm  
 表面: 镀锌  
**14Ga 3# Hinge**  
 Thickness:1.8mm  
 Finish:Galvanized



BT-H126

**边合页**  
 厚度: 2.5mm  
 宽度: 70mm  
 表面: 镀锌  
**Side Hinge**  
 Thickness:2.5mm  
 Width:70mm  
 Finished:Galvanized



BT-H127

**铝合金边合页**  
 厚度: 4.8mm  
 材料: 铝  
**Almuminum Side Hinge**  
 Thickness:4.8mm  
 Material:aluminum



BT-H128

**铝合金边合页**  
 厚度: 4.8mm  
 材料: 铝  
**Almuminum Side Hinge**  
 Thickness:4.8mm  
 Material:aluminum



BT-H135

**4#合页**  
 厚度: 1.8mm  
 表面: 镀锌  
**14Ga 4# Hinge**  
 Thickness:1.8mm  
 Finish:Galvanized



BT-H136

**5#合页**  
 厚度: 1.8mm  
 表面: 镀锌  
**14Ga 5# Hinge**  
 Thickness:1.8mm  
 Finish:Galvanized



BT-H137

**6#合页**  
 厚度: 1.8mm  
 表面: 镀锌  
**14Ga 6# Hinge**  
 Thickness:1.8mm  
 Finish:Galvanized



BT-H132M

**1#合页消音**  
 厚度: 1.8mm  
 表面: 镀锌  
**1#Mute Hinge**  
 Thickness:1.8mm  
 Finished:Galvanized



BT-H133M

**2#合页消音**  
 厚度: 1.8mm  
 表面: 镀锌  
**2#Mute Hinge**  
 Thickness:1.8mm  
 Finished:Galvanized



BT-H134M

**3#合页消音**  
 厚度: 1.8mm  
 表面: 镀锌  
**3#Mute Hinge**  
 Thickness:1.8mm  
 Finished:Galvanized



BT-H138

**双排消音边合页**  
 厚度: 2.5mm  
 宽度: 120mm  
 表面: 镀锌  
**Industrial mute side hinge**  
 Thickness:2.5mm  
 Width: 120mm  
 Finish:Galvanized



BT-H139

**双排消音边合页**  
 厚度: 2.5mm  
 宽度: 120mm  
 表面: 镀锌  
**Industrial mute side hinge**  
 Thickness:2.5mm  
 Width:120mm  
 Finish:Galvanized



BT-H140

**双排消音边合页**  
 厚度: 2.5mm  
 宽度: 120mm  
 表面: 镀锌  
**Industrial mute side hinge**  
 Thickness:2.5mm  
 Width:120mm  
 Finish:Galvanized



BT-H135M

**4#合页消音**  
 厚度: 1.8mm  
 表面: 镀锌  
**4#Mute Hinge**  
 Thickness:1.8mm  
 Finished:Galvanized



BT-H136M

**5#合页消音**  
 厚度: 1.8mm  
 表面: 镀锌  
**5#Mute Hinge**  
 Thickness:1.8mm  
 Finished:Galvanized



BT-H137M

**6#合页消音**  
 厚度: 1.8mm  
 表面: 镀锌  
**6#Mute Hinge**  
 Thickness:1.8mm  
 Finished:Galvanized



BT-H141

**双排消音边合页**  
 厚度: 2.5mm  
 宽度: 130mm  
 表面: 镀锌  
**Industrial mute side hinge**  
 Thickness:2.5mm  
 Width:130mm  
 Finish:Galvanized



BT-H142

**双排消音边合页**  
 厚度: 2.5mm  
 宽度: 130mm  
 表面: 镀锌  
**Industrial mute side hinge**  
 Thickness:2.5mm  
 Width:130mm  
 Finish:Galvanized



BT-H143

**双排消音边合页**  
 厚度: 2.5mm  
 宽度: 130mm  
 表面: 镀锌  
**Industrial mute side hinge**  
 Thickness:2.5mm  
 Width:130mm  
 Finish:Galvanized



BT-H144

**双排边合页**  
 厚度: 2.5mm  
 宽度: 150mm  
 表面: 镀锌  
**Industrial side hinge**  
 Thickness:2.5mm  
 Width:150mm  
 Finish:Galvanized



BT-H145

**双排边合页**  
 厚度: 2.5mm  
 宽度: 150mm  
 表面: 镀锌  
**Industrial side hinge**  
 Thickness:2.5mm  
 Width:150mm  
 Finish:Galvanized



BT-B201

**双排顶轮架**  
 厚度: 2.5mm  
 宽度: 150mm  
 表面: 镀锌  
**Industrial Top bracket**  
 Thickness:2.5mm,  
 Width: 150mm  
 Finish:Galvanized



BT-B202

**双排消音边合页**  
 厚度: 2.5mm  
 宽度: 130mm  
 表面: 镀锌  
**Industrial mute top bracket**  
 Thickness:2.5mm,  
 Width:130mm  
 Finish:Galvanized



BT-B203

**双排消音顶轮架**  
 厚度: 2.5mm  
 宽度: 120mm  
 表面: 镀锌  
**Industrial Mute Top bracket**  
 Thickness:2.5mm,  
 Width: 120mm  
 Finish:Galvanized



BT-B210

**双轨顶轮架**  
 厚度: 2.0&2.5mm  
 表面: 镀锌  
**Residential Top Bracket**  
 Thickness: 2.0&2.5mm  
 Finish:Galvanized



BT-B211

**双轨代替件**  
 厚度: 2.0mm  
 表面: 镀锌  
**Top Bracket Support**  
 Thickness:2.0mm  
 Finished:Galvanized



BT-B212

**可调底轮架**  
 厚度: 2.5mm  
 表面: 镀锌  
**Adjustable Bottom Bracket**  
 Thickness: 2.5mm  
 Finish:Galvanized



BT-B204

**民用顶轮架**  
 厚度: 1.5mm  
 表面: 镀锌  
**Residential Top bracket**  
 Thickness:1.5mm  
 Finish:Galvanized



BT-B205

**顶轮架**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Top bracket**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-B206

**消音顶轮架**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Mute Top bracket**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-B213

**铝可调底轮架**  
 厚度: 4.0mm  
 材料: 铝合金  
**Aluminum Bottom Bracket**  
 Thickness: 4.0mm  
 Material:Aluminum



BT-B214

**民用底轮架**  
 厚度: 2.5mm  
 表面: 镀锌  
**Residential Bottom Bracket**  
 Thickness: 2.5mm  
 Finish:Galvanized



BT-B215

**可调底轮架**  
 厚度: 2.5mm  
 表面: 镀锌  
**Adjustable Bottom Bracket**  
 Thickness:2.5mm  
 Finished:Galvanized



BT-B207

**顶轮架**  
 厚度: 2.3mm  
 表面: 镀锌  
**Top bracket**  
 Thickness: 2.3mm  
 Finish:Galvanized



BT-B208

**消音顶轮架**  
 厚度: 2.3mm  
 表面: 镀锌  
**Mute Top Hinge**  
 Thickness:2.3mm  
 Finished:Galvanized



BT-B209

**顶轮架**  
 厚度: 2.0&2.3&2.5mm  
 表面: 镀锌  
**Top bracket**  
 Thickness:2.0&2.3&2.5mm  
 Finish:Galvanized



BT-B216

**不可调底轮架**  
 厚度: 2.5mm  
 表面: 镀锌  
**Unadjustable Bottom Bracket**  
 Thickness:2.5mm  
 Finished:Galvanized



BT-B217

**底轮架**  
 厚度: 4.0mm  
 表面: 镀锌  
**Bottom Bracket**  
 Thickness:4.0mm  
 Finished:Galvanized



BT-B218

**民用轴承支架**  
 厚度: 2.5mm  
 表面: 镀锌  
 中心距: 67mm  
**Residential Bearing Bracket**  
 Thickness:2.5mm,  
 Finished:Galvanized  
 Bearing center distance:67mm



BT-B219

**民用轴承支架**

厚度: 2.5&4mm  
中心距: 85mm  
表面: 镀锌

**Residential Bearing Bracket**

Thickness: 2.5 & 4mm  
Bearing center distance: 85mm  
Finished: Galvanized



BT-B220

**轴承支架**

厚度: 4.0mm  
表面: 镀锌

**Bearing Bracket**

Thickness: 4.0mm  
Finished: Galvanized



BT-B221

**轴承支架**

厚度: 4.0mm  
宽度: 128mm  
表面: 镀锌

**Bearing Bracket**

Thickness: 4.0mm  
Width: 128mm  
Finished: Galvanized



BT-B228

**轴承支架**

厚度: 4.0mm  
表面: 镀锌

**Bearing Bracket**

Thickness: 4.0mm  
Finished: Galvanized



BT-B229

**轴承支架**

厚度: 4.0mm  
表面: 镀锌

**Bearing Bracket**

Thickness: 4.0mm  
Finished: Galvanized



BT-B230

**扭簧防断调节支架**

厚度: 4.0mm  
表面: 镀锌

**Spring Break Protection Adjust Bracket**

Thickness: 4.0mm  
Finish: Galvanized



BT-B222

**民用轴承支架**

厚度: 2.5mm  
中心距85mm  
表面: 镀锌

**Residential Bearing Bracket**

Thickness: 2.5mm  
Bearing center distance: 85mm  
Finished: Galvanized



BT-B223

**左右轴承支架**

厚度: 2.5mm  
直板到轴中心距离: 85  
表面: 镀锌

**Left & Right Bearing Bracket**

Thickness: 2.5mm  
Bearing center distance: 85mm  
Finished: Galvanized



BT-B224

**工业轴承支架**

厚度: 4.0mm  
直板到轴中心距离有: 85 & 110 & 123 & 148 & 185mm  
表面: 镀锌

**Industrial Bearing Bracket**

Thickness: 4.0mm  
Bearing Center distance: 85 & 110 & 123 & 148 & 185mm  
Finished: Galvanized



BT-B231

**加长扭簧防断调节支架**

厚度: 4.0mm  
表面: 镀锌

**Spring Break Protection Adjust Bracket**

Thickness: 4.0mm  
Finished: Galvanized



BT-B232

**外弹簧中心支架**

厚度: 2.5mm  
表面: 镀锌

**Spring Center Bracket**

Thickness: 2.5mm  
Finish: Galvanized



BT-B233

**轴支架**

厚度: 4.0mm  
表面: 镀锌

**Support Bracket**

Thickness: 4.0mm  
Finished: Galvanized



BT-B225

**万向轴承支架**

厚度: 4.0mm  
直板到轴中心距离有: 85 & 110 & 123 & 148 & 185mm  
表面: 镀锌

**Industrial Bearing Bracket**

Thickness: 4.0mm  
Bearing Center distance: 85 & 110 & 123 & 148 & 185mm  
Finished: Galvanized



BT-B226

**轴承支架**

厚度: 4.0mm  
表面: 镀锌

**Bearing Bracket**

Thickness: 4.0mm  
Finished: Galvanized



BT-B227

**轴承支架**

厚度: 4.0mm  
表面: 镀锌

**Bearing Bracket**

Thickness: 4.0mm  
Finished: Galvanized




BT-B234

**助推器调节板**

厚度: 4.0mm  
表面: 镀锌

**Pusher Adjustable Plate**

Thickness: 4.0mm  
Finish: Galvanized



BT-B235

**2"安全底部支架 (不可调)**

适用于2英寸轨道,  
11mm柄滚轮  
表面: 镀锌

**2" Safe Bottom Bracket (unadjustable)**

Suitable for 2" track  
11mm roller shaft  
Finish: Galvanized



BT-B236

**2"安全底部支架 (可调)**

适用于2英寸轨道,  
11mm柄滚轮  
表面: 镀锌

**2" Safe Bottom Bracket (adjustable)**

Suitable for 2" track  
11mm roller shaft  
Finish: Galvanized




BT-B237

**3"安全底部支架 (不可调)**  
适用于3英寸轨道,  
11mm柄滚轮  
表面: 镀锌  
**3" Safe Bottom Bracket (unadjustable)**  
Suitable for 3" track  
11mm roller shaft  
Finish:Galvanized



BT-B238

**民用安全底部支架**  
适用于2英寸轨道,  
11mm柄滚轮  
表面: 镀锌  
**Residential 2" Safe Bottom Bracket**  
Suitable for 2" track  
11mm roller shaft  
Finish:Galvanized



BT-B239

**3"安全底部支架 (可调)**  
适用于3英寸轨道,  
11mm柄滚轮  
表面: 镀锌  
**3" Safe Bottom Bracket (adjustable)**  
Suitable for 3" track  
11mm roller shaft  
Finish:Galvanized



BT-A301

**旗状角铁**  
厚度: 2.0&2.5mm  
长度: 460mm&530mm  
表面: 镀锌  
**Flag-shaped Joint Angle Iron**  
Thickness: 2.0&2.5mm  
Length:460mm&530mm  
Finish:Galvanized



BT-A302

**多孔角铁**  
厚度: 2.3&2.5mm  
表面: 镀锌板  
**Joint Angle Iron**  
Thickness: 2.3&2.5mm  
Finish:Pre-galvanized



BT-A303

**连接角铁**  
厚度: 2.3&2.5mm  
表面: 镀锌  
**Joint Angle Iron**  
Thickness: 2.3&2.5mm  
Finish:Galvanized




BT-B240

**3"安全底部支架 (可调)**  
适用于3英寸轨道,  
11mm柄滚轮  
表面: 镀锌  
**3" Safe Bottom Bracket (adjustable)**  
Suitable for 3" track,  
11mm roller shaft  
Finish:Galvanized



BT-B240

**不可调底轮架**  
厚度: 2.5mm  
表面: 镀锌板  
**Unadjustable Bottom Bracket**  
Thickness:2.5mm  
Finished:Galvanized steel



BT-A304

**工业连接角铁**  
厚度: 2.0mm  
表面: 镀锌  
**Industrial Joint Angle Iron**  
Thickness: 2.0mm  
Finish:Galvanized



BT-A305

**侧面支架**  
厚度: 2.5mm  
长度: 90&95&110&120&150mm  
表面: 镀锌,用于固定轨道  
**Side bracket**  
Thickness: 2.5mm  
Length:90&95&110&120&150mm  
Finish:Galvanized  
For fixing of track



BT-A306

**角码**  
厚度: 2.0mm  
长度: 90&110&120&130mm  
表面: 镀锌板  
**Jamb Bracket**  
Thickness:2.0mm  
Length:90&110&120&130mm  
Finished:Galvanized steel



BT-A307

**双轨连接片**  
厚度: 1.5mm  
表面: 镀锌  
**Double Track Coupler**  
Thickness: 1.5mm  
Finish:Galvanized




BT-A308

**小门固定板**  
厚度: 2.5mm  
表面: 镀锌  
**Bracket**  
Thickness:2.5mm  
Finished:Galvanized



BT-A309

**平衡轴支架板**  
厚度: 1.5mm  
表面: 镀锌板  
**Balance System Bracket**  
Thickness: 1.5mm  
Finish:Pre-Galvanized



**中置梁支架**  
 厚度: 4.0mm  
 表面: 镀锌  
**Beam Support Bracket**  
 Thickness: 4.0mm  
 Finish: Galvanized



**直轨**  
 厚度: 1.8&2.0mm  
 表面: 镀锌板  
**Vertical Track**  
 Thickness: 1.8&2.0mm  
 Finish: Galvanized Steel



**弯轨**  
 厚度: 1.8&2.0mm  
 表面: 镀锌板  
**Curve Track**  
 Thickness: 1.8&2.0mm  
 Finish: Galvanized Steel




**底封条**  
 材质: 三元乙丙  
**Bottom Seal**  
 Suitable for :40mm panel  
 Material: EPDM



**底封条**  
 材质: 三元乙丙  
**Bottom Seal**  
 Suitable for :80mm panel  
 Material: EPDM



**侧封条**  
 材质: 三元乙丙  
**Side Seal**  
 Material: EPDM



**辅轨**  
 厚度: 1.8&2.0mm  
 表面: 镀锌板  
**Corner support**  
 Thickness: 1.8&2.0mm  
 Finish: Galvanized steel




**水平横梁**  
 厚度: 2.0mm  
 表面: 镀锌  
**Cross Beam**  
 Thickness: 2.0mm  
 Finish: Galvanized



**铝底封&铝顶封**  
 厚度: 1.2mm  
 材质: 铝  
**Bottom/Top Profile**  
 Thickness: 1.2mm  
 Suitable for :40&50&80mm panel  
 Material: Aluminium



**顶封条**  
 材质: 三元乙丙  
**Top Seal**  
 Material: EPDM



**底封条**  
 材料: PVC  
**Bottom seal**  
 Material: PVC



**底封条**  
 材料: EPDM  
**Bottom seal**  
 Material: EPDM



**底封条**  
 材质: 三元乙丙  
**Bottom Seal**  
 Suitable for :50mm panel  
 Material: EPDM



BT-SP401

**工业门15寸助推器**  
 厚度: 2.5mm  
 总长: 380mm  
 表面: 镀锌  
**Industrial 15" Spring Bumper**  
 Thickness: 2.5mm  
 Finished:Galvanized  
 Total Lenth:15"



BT-SP402

**工业门27寸助推器**  
 厚度: 2.5mm  
 总长: 680mm  
 表面: 镀锌  
**Industrial 27" Spring Bumper**  
 Thickness: 2.5mm  
 Finished:Galvanized  
 Total Lenth:27"



BT-SP403

**小号车库门助推器**  
 厚度: 2.5mm  
 适用于小门助推  
 表面: 镀锌  
**Small Size Spring Bomper**  
 Thickness: 2.5mm  
 Finished:Galvanized  
 Suit for small door pusher



BT-SP410

**扭簧**  
 内径: 93mm  
 钢丝直径: 7.0-10mm  
 表面: 镀锌&防锈油&电泳  
**Spring**  
 Inside diameter:3 3/4"  
 Diameter of wire:7.0-10mm  
 Finish:Anti-rust oil&  
 Galvanized&Electrophoresis



BT-SP411

**扭簧**  
 内径: 132mm  
 钢丝直径: 7.0-10.5mm  
 表面: 镀锌&防锈油&电泳  
**Spring**  
 Inside diameter:5 1/4"  
 Diameter of wire:7.0-10.5mm  
 Finish:Anti-rust oil&  
 Galvanized&Electrophoresis



BT-SP412

**扭簧内衬95**  
 材质: PVC  
**Torsion Spring Fillet 3-3/4"**  
 Material: PVC



BT-SP404

**小号车库门助推器**  
 厚度: 2.5mm  
 适用于小门助推  
 表面: 镀锌  
**Small Size Spring Bumper**  
 Thickness: 2.5mm  
 Finished:Galvanized  
 Suit for small door pusher



BT-SP405

**扭簧防断装置**  
 1英寸内孔, 适用3-3/4接头  
 表面: 镀锌  
**Spring Break Protection**  
**1"Bearing**  
 Suit for 3 3/4" Spring fitting  
 Finished:Galvanized



BT-SP406

**扭簧防断装置**  
 厚度: 4.0mm 32.75mm内孔  
 表面: 镀锌  
**Spring Break Protection for**  
**1.25"Bearing**  
 Thickness:4.0mm  
 Finished:Galvanized



BT-SP413

**扭簧内衬152**  
 材质: PVC  
**Torsion Spring Fillet 6"**  
 Material: PVC



BT-SP407

**扭簧防断装置**  
 厚度: 4.0mm 25.4mm内孔  
 表面: 镀锌  
**Spring Break Protection for**  
**1"Bearing**  
 Thickness:4.0mm  
 Finished:Galvanized



BT-SP408

**扭簧**  
 内径: 50mm  
 钢丝直径: 5.0-6.8mm  
 表面: 镀锌&防锈油&电泳  
**Spring**  
 Inside diameter:2"  
 Diameter of wire:5.0-6.8mm  
 Finish:Anti-rust oil&  
 Galvanized&Electrophoresis



BT-SP409

**扭簧**  
 内径: 65mm  
 钢丝直径: 6.5-8.0mm  
 表面: 镀锌&防锈油&电泳  
**Spring**  
 Inside diameter:2 5/8"  
 Diameter of wire:6.5-8.0mm  
 Finish:Anti-rust oil&  
 Galvanized&Electrophoresis



BT-D098

**8"平轮**  
 最大提升高度: 2440mm  
 运转时承载量: 240kg  
 适用于钢丝绳直径: 3.18mm  
 适用于25.4mm外径的轴杆  
**Drum 8FT**  
 Maximum door height:96"  
 Maximum door weight:240kg  
 Maximum cable diameter:1/8"  
 Diameter shaft:1"



BT-D099

**11"平轮**  
 最大提升高度: 3352mm  
 运转时承载量: 260kg  
 适用于钢丝绳直径: 3.18mm  
 适用于25.4mm外径的轴杆  
**Drum 11FT**  
 Maximum door height:132"  
 Maximum door weight:260kg  
 Maximum cable diameter:1/8"  
 Diameter shaft:1"



BT-D100

**12"平轮**  
 最大提升高度: 3650mm  
 运转时承载量: 340kg  
 适用于钢丝绳直径: 4mm  
 适用于25.4mm外径的轴杆  
**Drum 12FT**  
 Maximum door height:144"  
 Maximum door weight:340kg  
 Maximum cable diameter:5/32"  
 Diameter shaft:1"



BT-D107

**120半塔**  
 垂直提升高度: 3050mm  
 最大提升高度: 6860mm  
 运转时承载量:450kg  
 适用于钢丝绳直径: 5mm  
 适用于25.4mm外径的轴杆  
**Drum 120HL**  
 Maximum hiliift: 120"  
 Maximum door height:270"  
 Maximum door weight:450kg  
 Maximum cable diameter:3/16"  
 Diameter shaft:1"



BT-D108

**164半塔**  
 垂直提升高度: 4165mm  
 最大提升高度: 10165mm  
 运转时承载量:575kg  
 适用于钢丝绳直径: 6mm  
 适用于31.75mm外径的轴杆  
**Drum 164HL**  
 Maximum hiliift: 164"  
 Maximum door height:400"  
 Maximum door weight:575kg  
 Maximum cable diameter:1/4"  
 Diameter shaft:1"



BT-D109

**1-3/4"扭簧接头**  
 适用于44mm内径的弹簧  
 适用于25.4mm外径的轴杆  
**Spring Fitting 1-3/4"**  
 Suitable inner diameter:1-3/4"  
 For shaft 1"



BT-D101

**18"平轮**  
 最大提升高度: 5500mm  
 运转时承载量: 680kg  
 适用于钢丝绳直径: 5mm  
 适用于25.4mm外径的轴杆  
**Drum 18FT**  
 Maximum door height:217"  
 Maximum door weight:680kg  
 Maximum cable diameter:3/16"  
 Diameter shaft:1"



BT-D102

**32"平轮**  
 最大提升高度: 9750mm  
 运转时承载量: 700kg  
 适用于钢丝绳直径: 6mm  
 适用于25.4mm外径的轴杆  
**Drum 32FT**  
 Maximum door height:384"  
 Maximum door weight:700kg  
 Maximum cable diameter:1/4"  
 Diameter shaft:1"



BT-D103

**11塔轮**  
 最大提升高度: 3350mm  
 运转时承载量: 500kg  
 适用于钢丝绳直径: 5mm  
 适用于25.4mm外径的轴杆  
**Drum 11VL**  
 Maximum door height:132"  
 Maximum door weight:500kg  
 Maximum cable diameter:3/16"  
 Diameter shaft:1"



BT-D110

**2"扭簧接头**  
 适用于50mm内径的弹簧  
 适用于25.4mm外径的轴杆  
**Spring Fitting 2"**  
 Suitable inner diameter:2"  
 For shaft 1"



BT-D111

**2-5/8"扭簧接头**  
 适用于67mm内径的弹簧  
 适用于25.4mm外径的轴杆  
**Spring Fitting 2-5/8"**  
 Suitable inner diameter:2-5/8"  
 For shaft 1"



BT-D112

**3-3/4"扭簧接头**  
 适用于95mm内径的弹簧  
 适用于25.4mm外径的轴杆  
**Spring Fitting 3-3/4"**  
 Suitable inner diameter:3-3/4"  
 For shaft 1"



BT-D104

**18塔轮**  
 最大提升高度: 5480mm  
 运转时承载量: 500kg  
 适用于钢丝绳直径: 5mm  
 适用于25.4mm外径的轴杆  
**Drum 18VL**  
 Maximum door height:216"  
 Maximum door weight:500kg  
 Maximum cable diameter:3/16"  
 Diameter shaft:1"




BT-D105

**28塔轮**  
 最大提升高度: 8540mm  
 运转时承载量: 750kg  
 适用于钢丝绳直径: 6mm  
 适用于25.4mm外径的轴杆  
**Drum 28VL**  
 Maximum door height:336"  
 Maximum door weight:750kg  
 Maximum cable diameter:1/4"  
 Diameter shaft:1"



BT-D106

**5-54半塔**  
 垂直提升高度: 1370mm  
 最大提升高度: 6170mm  
 运转时承载量: 500kg  
 适用于钢丝绳直径: 5mm  
 适用于25.4mm外径的轴杆  
**Drum 5-54HL**  
 Maximum hiliift: 54"  
 Maximum door height:243"  
 Maximum door weight:500kg  
 Maximum cable diameter:3/16"  
 Diameter shaft:1"



BT-D113

**5-1/4"扭簧接头**  
 适用于132mm内径的弹簧  
 适用于25.4mm外径的轴杆  
**Spring Fitting 5-1/4"**  
 Suitable inner diameter:5-1/4"  
 For shaft 1"



BT-D114

**6"扭簧接头**  
 适用于152mm内径的弹簧  
 适用于25.4mm外径的轴杆  
**Spring Fitting 6"**  
 Suitable inner diameter:6"  
 For shaft 1"



BT-SH601

**空心轴**  
 厚度: 2.0&2.5&3.0mm  
 外径: 25.4mm  
**Hollow Shaft**  
 Thickness: 2.0&2.5&3.0mm  
 Outside diameter:1"



BT-SH602

**实心轴**  
 外径: 25.4mm  
**Solid Shaft**  
 Outside diameter:1"



BT-SH603

**空心轴**  
 外径: 25.4mm  
 厚度: 1.8mm  
**Hollow Shaft**  
 Outside diameter:1"  
 Thickness: 1.8mm



BT-SH610

**联轴器**  
 内径: 31.75mm  
 长度: 120mm  
 表面: 镀锌  
**Shaft Coupler**  
 Inside diameter:1-1/4",  
 Length:120mm  
 Finished:Galvanized



BT-SH612

**限位套**  
 孔径: 25.4mm  
 表面: 镀锌  
**Ferrule**  
 Inside diameter:1"  
 Finish:Galvanized



BT-SH604

**轴销**  
 尺寸: 6.35\*6.35\*75mm  
**Shaft Key**  
 Size:6.35\*6.35\*75mm  
 For shaft



BT-SH605

**联轴器**  
 孔径: 25.4mm  
 长度: 90mm  
 材料: 铝合金  
**Shaft Coupler**  
 Inside diameter:1"  
 Length:90mm  
 Material:Aluminum



BT-SH606

**联轴器**  
 内径: 25.4mm  
 长度: 90mm  
 表面: 镀锌  
**Shaft Coupler**  
 Inside diameter:1"  
 Length:90mm  
 Finished:Galvanized



BT-SH607

**联轴器**  
 孔径: 25.4mm  
 长度: 120mm  
 材料: 铝合金  
**Shaft Coupler**  
 Inside diameter:1"  
 Length:120mm  
 Material:Aluminum



BT-SH608

**联轴器**  
 孔径: 25.4mm  
 表面: 镀锌  
**Shaft Coupler**  
 Inside diameter:1"&1-1/4"  
 Finish:Galvanized



BT-SH609

**联轴器**  
 内径: 25.4mm  
 长度: 120mm  
 表面: 镀锌  
**Shaft Coupler**  
 Inside diameter:1"  
 Length:120mm  
 Finished:Galvanized



BT-L701

**插销锁**  
 底座厚度: 1.5mm  
 插片厚度: 4.0mm  
 固定孔的中心距离: 103mm  
**Industrial Latch Lock**  
 Thickness of case:1.5mm  
 Thickness of bar:4mm  
 The center line of the fixing holes: 103mm



BT-L702

**民用插销**  
 底座厚度: 1.5mm  
 插片厚度: 4.0mm  
 固定孔的中心距离: 83mm  
**Residential Latch**  
 Thickness of case:1.5mm  
 Thickness of bar:4mm  
 The center line of the fixing holes: 83mm



BT-L703

**插销**  
 材料厚: 2.0mm  
**Latch**  
 Thickness:2.0mm



BT-L710

**手动锁**  
 表面: 镀铬  
**Handle Lock**  
 Finished:Chrome plating



BT-L711

**手动锁**  
 表面: 镀铬  
**Handle Lock**  
 Finished:Chrome plating



BT-L712

**手动锁**  
 包含锁芯, 面板, 锁盒, 螺丝  
 材料:锁锌合金, 铜  
**Handle Lock**  
 Include lock mechanism.  
 Autolatch,Striker,Swivel latch,Wirerope,85mm long square shaft



BT-L704

**工业插销**  
 底座厚度: 2.0mm  
 插片厚度: 4.0mm  
 表面: 镀锌  
**Industrial Latch**  
 Thickness of case:2.0mm,  
 Thickness of bar:4.0mm  
 Finish:Galvanized



BT-L705

**拉手**  
 装配孔中心距离140mm  
 表面:镀锌  
**Lift handle**  
 Mounting holes 5-1/2" on centers  
 Finish:Galvanized



BT-L706

**工业门提手**  
 装配孔中心距离105mm  
**Industrial Black Lift Handle**  
 Mounting holes 105mm on centers



BT-L713

**门中门锁**  
 包含锁芯, 面板, 锁盒, 螺丝  
 材料:锁芯铜, 面板不锈钢  
**Door Lock in the Door**  
 Include lock mechanism  
 lock box,face-plate,screws  
 Material:Copper,Stainless steel



BT-L707

**黑色拉手**  
 材料: ABS  
**Lift handle**  
 Material: ABS



BT-L708

**白色拉手**  
 材料: ABS  
**Lift handle**  
 Material: ABS



BT-L709

**车库门应急锁**  
 适合4公分和5公分门板  
 表面: 镀铬  
**Emergency Lock**  
 Suit for 4cm and 5cm door  
 Finish:Chrome plated



BT-P801

**防夹手门板**  
 厚度: 40mm&50mm  
**Finger Protection Panel**  
 Width:450-550mm  
 Panel thickness:40&50mm  
 Color:White&grey etc



BT-P802

**普通门板**  
 厚度: 40mm&50mm  
**Normal Panel**  
 Width:450-550mm  
 Panel thickness:40&50mm  
 Color:Wooden color



BT-P803

**普通门板**  
 厚度: 40mm&50mm  
**Normal Panel**  
 Width:450-550mm  
 Panel thickness:40&50mm  
 Color:wooden color



BT-901

**4"滑轮**  
 厚度: 1.8mm  
 表面: 镀锌  
**4" Pulley**  
 Thickness:1.8mm  
 Finish:Galvanized



BT-902

**3"滑轮**  
 厚度: 1.5mm  
 表面: 镀锌  
**3" Pulley**  
 Thickness:1.5mm  
 Finish:Galvanized



BT-903

**钢丝绳**  
 直径: 3.18&4&5&6mm  
**Cable**  
 Diameter:1/8",  
 5/32",3/16",1/4"



BT-P804

**普通门板**  
 厚度: 40mm&50mm  
**Normal Panel**  
 Width:450-550mm  
 Panel thickness:40&50mm  
 Color:Red



BT-P805

**门封**  
 厚度: 0.8&1.0mm  
**End Cap**  
 Thickness:0.8&1.0mm  
 Length: 500mm&610mm



BT-W806

**窗户**  
 尺寸: 630\*330mm  
 材料: ABS, 双层玻璃  
**Window**  
 Size:630\*330mm  
 Material: ABS,Two layer



BT-904

**底部钢丝滑轮**  
 底座厚度: 3.75mm  
 表面: 镀锌  
**Bottom Pulley**  
 Bracket Thickness:3.75mm  
 Finish:Galvanized



BT-905

**轴承**  
 材料: 碳钢  
 内径: 25.4mm  
**Bearing**  
 Material:Carbon Steel  
 Inner diameter:1"



BT-906

**塑料轴承**  
 材料: 塑料  
 内径: 25.4mm  
**Plastic Bearing**  
 Material:Plastic  
 Inner diameter:1"




BT-W807

**窗户**  
 尺寸: 600\*130mm  
 材料: ABS, 双层玻璃  
**Window**  
 Size:600\*130mm  
 Material: ABS,Two layer



BT-W808

**工业门小窗**  
 尺寸: 660\*220mm  
 开孔尺寸: 627\*190mm  
**Windows**  
 Size:660\*220mm  
 Opening size:627\*190mm



BT-W809

**工业门小窗**  
 尺寸: 650\*320mm  
 开孔尺寸: 617\*288mm  
**Windows**  
 Size:650\*320mm  
 Opening size:617\*288mm



BT-S907

**门板螺丝**  
 规格: M6.35\*20、M6.35\*25  
**Tapping screw for door panels**  
 Size:1/4"\*20 & 1/4"\*25



BT-S908

**马车螺丝 + 法兰螺母**  
 规格: M10\*20  
**Bolt**  
 Size:3/8"\*3/4"



BT-S909

**马车螺丝+法兰螺母**  
 规格: M8\*16  
 表面: 镀锌  
**Carriage Bolt**  
 Size:8mm\*16mm  
 Finished:Galvanized



BT-S910

轨道螺丝  
规格: M6\*16  
Track Bolt  
Size: 1/4" \* 5/8"



BT-S911

外六角螺丝+法兰螺母  
表面: 镀锌  
Hexagon Head Screw  
SizeA: 10mm \* 25mm  
SizeB: 10mm \* 40mm  
Finished: Galvanized



BT-S912

5.5\*50自攻螺丝  
适合M8套筒  
Self Tapping screw  
Size: 5.5mm \* 50mm  
Suitable for 8mm Sleeves  
Finished: Galvanized



BT-S919

4006葫芦  
传动比: 4:1  
4006 Chain Hoist  
Gear ratio: 4:1



BT-S920

间隙套,  
尺寸: 12\*19\*21.5mm  
Positioning sleeve  
Size: 12\*19\*21.5mm



BT-S921

钢丝绳  
表面: 镀锌&304不锈钢  
直径: 3.18&4&5&6mm  
Cable  
Diameter: 3.18&4&5&6mm  
Finished: Galvanized or 304 stainless steel



BT-S913

5.5\*32自攻螺丝  
Self Tapping screw  
Size: 5.5mm \* 32mm  
Finished: Galvanized



BT-S914

塑料膨胀螺丝  
规格: M8\*50  
Expansion screws  
Size: 5/16" \* 2"



BT-S915

塑料膨胀螺丝  
规格: M8\*80  
Expansion screws  
Size: 5/16" \* 3 5/16"



BT-S922

外置加强筋  
表面: 镀锌板  
厚度: 0.9mm  
Strengthening Profile  
Thickness: 0.9mm  
Finished: Galvanized steel



BT-S923

球面轴承  
内径: 25.4mm  
Heavy bearing block  
Inside diameter: 1"



BT-S924

铝套  
内径: 3.18&4&5&6mm  
Cable folder  
Inside diameter: 3.18&4&5&6mm



BT-S916

滑轮夹板  
Sheave fork



BT-S917

拉簧门配件  
Extension spring door parts



BT-S918

4020葫芦  
传动比: 4:1  
4020 Chain Hoist  
Gear ratio: 4:1



BT-S925

安装支架  
表面: 镀锌板  
厚度: 1.5mm  
Installation Bracket  
Thickness: 1.5mm  
Finished: Galvanized steel



BT-S926

小门铝合页  
材质: 铝  
Hinge  
Suitable for: small door  
Material: Aluminum



BT-S927

抱箍  
表面: 镀锌  
厚度: 4.0mm  
Hoop  
Thickness: 4mm  
Finished: Galvanized



BT-M808

**车库门电机参数 ( 600N、800N )**

规格	600N	800N
电源电压	AC HOV 50HZ	AC 110 50HZ
马达力矩	600N/M	800N/M
待机功耗	8W	8W
工作温度	零下20° C-70° C	零下20° C-70° C
湿度	≤60%	≤60%
最大开门面积	≤8 平方	≤10 平方
工作频率	433.92MHz	433.92MHz
编码方式	滚码	滚码
照明灯	24V LED	24V LED



**16 ft. x 7 ft. doors hardware**

- 10 × 11-ball Nylon Rollers
- 11 x #1 Hinges (14-Gauge)
- 2 x #2 Hinges (14-Gauge)
- 2 x #3 Hinges (14-Gauge)
- 2 x Top Brackets
- 2 x Bottom Brackets
- 2 x #5 Door Jamb
- 2 x #6 Door Jamb
- 2 x Flag Brackets
- 2 x End Bearing Plates
- 1 x Center Support Bracket, 1 x Plastic Center Support
- 2 x cable Drums
- 2 × 8 ft. Lift Cables
- 2 x Lift Handles.
- Fasteners Included:
- 90 x Self-Tapping Screws (7/16 in. - 20 tpi x 1 in.)
- 20 x Lag Screws (7/16 in. x 2 in. HH)
- 16 x Carriage Bolts (1/4 in. - 20 tpi x 5/8 in.)
- 12 x Tap Nuts / Bolts (5/16 in. x 7/16 in. head x 1 in.)
- 6 x Carriage Nuts / Bolts (3/8" - 16 tpi x 1")
- 4 x Lag Screws (7/16" x 2.5" HH)
- 2 x Tap Nuts / Bolts (3/8" x 9/16 head x 1.5").

**8 ft. x 7 ft. doors hardware**

- 5 × 11-ball Nylon Rollers
- 11 x #1 Hinges (14-Gauge)
- 2 x #2 Hinges (14-Gauge)
- 2 x #3 Hinges (14-Gauge)
- 2 x Top Brackets
- 2 x Bottom Brackets
- 2 x #5 Door Jamb
- 2 x #6 Door Jamb
- 2 x Flag Brackets
- 2 x End Bearing Plates
- 1 x Center Support Bracket, 1 x Plastic Center Support
- 2 x cable Drums
- 2 × 8 ft. Lift Cables
- 2 x Lift Handles.
- Fasteners Included:
- 90 x Self-Tapping Screws (7/16 in. - 20 tpi x 1 in.)
- 20 x Lag Screws (7/16 in. x 2 in. HH)
- 16 x Carriage Bolts (1/4 in. - 20 tpi x 5/8 in.)
- 12 x Tap Nuts / Bolts (5/16 in. x 7/16 in. head x 1 in.)
- 6 x Carriage Nuts / Bolts (3/8" - 16 tpi x 1")
- 4 x Lag Screws (7/16" x 2.5" HH)
- 2 x Tap Nuts / Bolts (3/8" x 9/16 head x 1.5").



BT-M809

**工业门电机**

**电压:** 220V-50/60Hz  
**功率:** 0.1 KW & 0.75 KW & 1.5 KW  
**输出扭矩:** 25N · m & 70N · m & 100N · m  
**适用面积:** 12m² & 20-35m² & 35-55 m²  
**Industrial Motor**  
**Supply Voltage:** 220V-50/60Hz  
**Power:** 0.1 KW & 0.75 KW & 1.5 KW  
**Rated Torque:** 25N · m & 70N · m & 100N · m  
**Suit for Max. Area:** 12m² & 20-35m² & 35-55m²